

INSTALLER FRIENDLY SERIES® In-Site® Single Phase Duplex

Single phase, duplex demand dose or timed dose, float or C-Level™ sensor controlled system for pump control, system monitoring, event logging and reporting.

The IFS In-Site® duplex control panel is designed to control two (alternating) 120, 208, or 240 VAC single phase pumps in water and sewage installations. The alternating action equalizes pump wear. In addition to the alternating pump control, this system provides override control should either pump fail. The panel features an easy-to-use touch pad with display on the inner door for programming and system monitoring. The panel configuration can be easily converted in the field to either a timed dose or demand dose. Quick retrieval of all system events including pump run times, pump cycles, alarm conditions, power outages, service calls and more can be done by downloading panel information onto a USB flash drive. Data reports make diagnosing system conditions easy.

The optional C-Level™ sensor is a pressure transducer that senses the liquid level in the tank and sends a signal to the IFS panel. Pump activation levels can be adjusted by using the panel touch pad. C-Level™ CL40 sensor operating range is 3-39.9 inches (7.6-101.3 cm). C-Level™ CL100 operating range is 3-99.5 inches (7.6-252.7 cm).

TOUCH PAD FEATURES


- A. **Level Status Indicators** illuminate when floats or set points are activated. Alarm will activate if a float operates out of sequence.
- B. **HOA (Hand-Off-Automatic) Buttons** with indication control pump mode. Hand mode defaults to Automatic when stop level or redundant off level is reached.
- C. **Pump Run Indicators** will illuminate when pumps are called to run.
- D. **LED Display** shows system information including: level in inches or centimeters (C-Level™ only), mode, pumps elapsed time (hh:mm), events (cycles), alarm counter, float error count, timed dose override counter (timed dose only), pump ON/OFF times (timed dose only), and sequence ON/OFF times (timed dose only).
- E. **NEXT Push Button** toggles display.
- F. **UP and SET Push Buttons** used to set pump ON/OFF times (timed dose only), pump operation (alternate 1-2 and 2-1), date and hour, activation levels (C-Level™ only).
- G. **Control Fuse**
- H. **Alarm Fuse**
- I. **USB Port** for flash drive to download time-stamped system events.
- J. **Manual Report Switch** date and time stamps service calls.

PANEL COMPONENTS

1. **Enclosure base** measures 16 X 14 X 6 inches (40.64 X 35.56 X 15.24 cm). NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use). **Note:** Options, voltage, and amp range selected may change enclosure size and component layout.
2. **Red Alarm Beacon** provides 360° visual check of alarm condition.
3. **Exterior Alarm Test/Normal/Silence Switch** allows horn and light to be tested and horn to be silenced in an alarm condition. Alarm automatically resets once alarm condition is cleared.
4. **Alarm Horn** provides audio warning of alarm condition (83 to 85 decibel rating).
5. **Circuit Breakers** (optional) provide pump disconnect and branch circuit protection.
6. **Power Relays** control pump by switching electrical lines. Definite purpose contactors used when pump full load amps are above 15.
7. **Float Connection Terminal Block**
8. **Incoming Control/Alarm Terminal Block**
9. **Control Power Indicator/Fuse** indicator light illuminates if control power is present in panel. Alarm activates if control fuse is blown.
10. **Alarm Power Indicator/Fuse** indicator light illuminates if alarm power is present in panel.
11. **Ground Lugs**
12. **Incoming Pump Power Connections**
13. **RF Filter**
14. **Power Supply**

NOTE: Schematic/Wiring Diagram and Pump Specification Label are located inside the panel on enclosure cover.

SEE BACKSIDE FOR COMPLETE LISTING OF AVAILABLE OPTIONS. SEE PRICE BOOK FOR LIST PRICE.

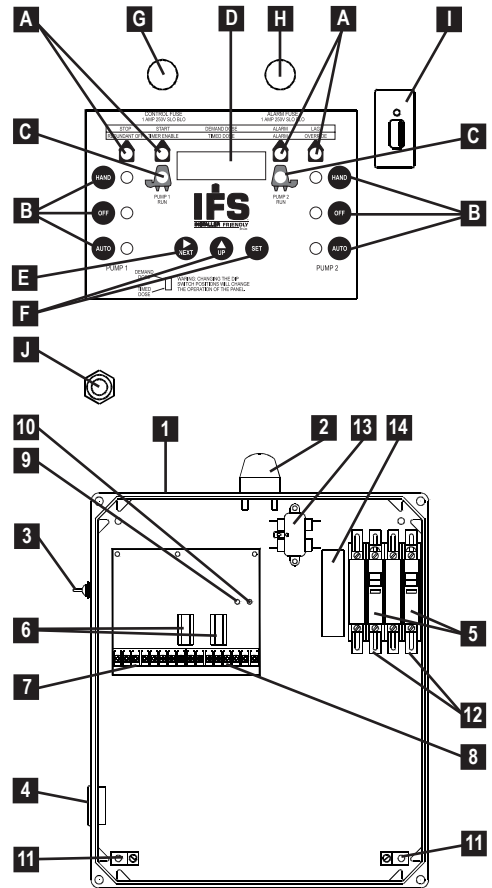

Model Shown IFI31W114X8AC

Reg. Cdn Pat. & TM Off

C-Level™ Sensor US Patent No. 8,336,385; 8,567,242; 8,650,949

FEATURES

- Entire control system is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes:
 - Demand Dose** - three 20' control switches
 - Timed Dose** - two 20' control switches
- Available with EZconnex® float system
- Complete with step-by-step installation instructions
- Five-year limited warranty



SJE RHOMBUS


PO Box 1708, Detroit Lakes, MN 56502

1-888-DIAL-SJE • 1-218-847-1317

1-218-847-4617 Fax

email: customer.service@sjerhombus.com

www.sjerhombus.com B.25

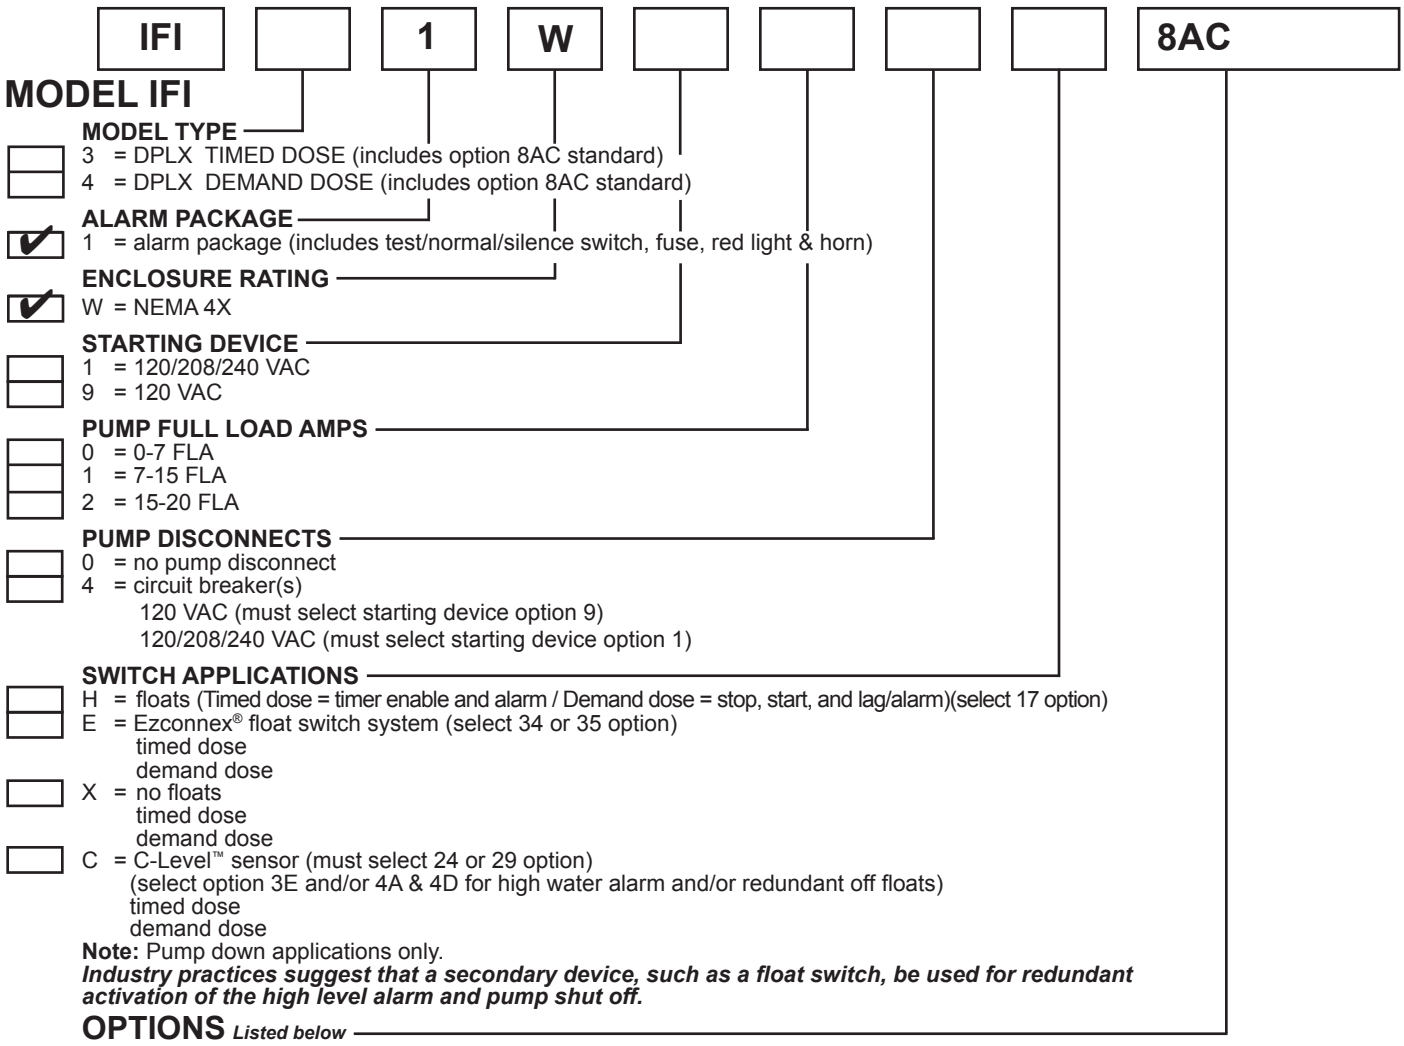

- CODE DESCRIPTION**
- 1J Duo alarm inputs
 - 3A Alarm flasher
 - 3B Manual reset alarm
 - 3E High water alarm float (*must select 17 option*)
(Available only when Switch Applications = C)
 - 4A Redundant off (*select option 4D if floats are required*)
 Demand Dose
 Timed Dose
 - 4D Redundant off float
(must select 4A option) (must select 17 option)
 - 6A Auxiliary alarm contacts, form C
 - 8AC Display board includes: ETM counter, events (cycles) counter, alarm counter, and override counter (timed dose only). *(Included as standard.)*
 - 10E Lockable latch - NEMA 4X
 - 10F Lightning arrestor (*must select pump circuit breakers, control and alarm power combined*)
 - 10K Anti-condensation heater
(must select if operating temperature is colder than 0 degrees F (-18 degrees C.))
 - 11C NEMA 1 alarm panel (*must select option 6A*)
 - 11D NEMA 4X alarm panel (*must select option 6A*)
 - 15A Control / Alarm circuit breaker
 - 16A 10' cord in lieu of 20' (*per float*)
 - 16B 15' cord in lieu of 20' (*per float*)
 - 16C 30' cord in lieu of 20' (*per float*)
 - 16D 40' cord in lieu of 20' (*per float*)

- CODE DESCRIPTION**
- 17C Sensor Float® / internally weighted ▲ (*per float*)
 - 17D Sensor Float® / externally weighted ▲ (*per float*)
 - 17G MilliAmpMaster™ / pipe clamp ● (*per float*)
 - 17H MilliAmpMaster™ / externally weighted ● (*per float*)
 - 17J Sensor Float® / pipe clamp ▲ (*per float*)
 - 18A Timer override float
 (timed dose float panel only)
 - 19F Fourth float to separate alarm function from lag
 (demand dose float panel only)
 - 24E C-Level™ sensor with 4' vent tube & 20' cord
 - 24F C-Level™ sensor with 4' vent tube & 40' cord
 - 24G C-Level™ sensor with 8' vent tube & 20' cord
 - 24H C-Level™ sensor with 8' vent tube & 40' cord
 - 24X No C-Level™ CL40 sensor
 - 29A C-Level™ CL100 sensor w/10' vent tube & 20' cord
 - 29B C-Level™ CL100 sensor w/10' vent tube & 40' cord
 - 29X No C-Level™ CL100 sensor
 - 34D EZconnex® 4-Port, 25', w/10' floats (3) /pipe clamp, sealing plug *
 - 34E EZconnex® 4-Port, 50', w/10' floats (3) /pipe clamp, sealing plug *
 - 34G EZconnex® 4-Port, 25', w/20' floats (3) /pipe clamp, sealing plug *
 - 34H EZconnex® 4-Port, 50', w/20' floats (3) /pipe clamp, sealing plug *
 - 35D EZconnex® 4-Port, 25', w/10' floats (4) /pipe clamp *
 - 35E EZconnex® 4-Port, 50', w/10' floats (4) /pipe clamp *
 - 35G EZconnex® 4-Port, 25', w/20' floats (4) /pipe clamp *
 - 35H EZconnex® 4-Port, 50', w/20' floats (4) /pipe clamp *

● Mechanically-activated ▲ Mercury-activated * EZconnex® mechanically-activated, narrow angle float switches with quick release connections.