

# MODEL TD Control Panel


## Single phase, simplex timed dosing pump control.

The Model TD control panel provides a reliable means of controlling one single phase pump in onsite septic installations. A programmable timer activates a magnetic motor contactor to turn the pump on and off. A low level cutout float overrides the timer to prevent the pump from running dry. An alarm float activates the audio/visual alarm system indicating a high liquid level. Common applications include sand filter systems, pressure distribution systems, mound systems, or any application requiring a timed dose.

## PANEL COMPONENTS

- 1. Enclosure** measures 10 x 8 x 4 inches (25.40 x 20.32 x 10.16 cm) NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for outdoor or indoor use).
- 2. Magnetic Motor Contactor** controls pump by switching electrical lines.
- 3. HOA Switch** for manual pump control.
- 4. Control Fuse**
- 5. Alarm Fuse**
- 6. Float Switch Terminal Block**
- 7. Incoming Power Terminal Block**
- 8. Programmable Timer** with separate variable controls allows for setting the on and off times from .05 seconds to 30 hours.
- 9. Circuit Breaker** provides pump disconnect and branch circuit protection.
- 10. Spare Fuse**
- 11. Backplate Label** includes diagram of float, pump, and power connections.
- 12. Ground Lug**

**NOTE:** Timer Installation Label and Pump/Float Switch Installation Specification Label are located inside the panel on enclosure cover.

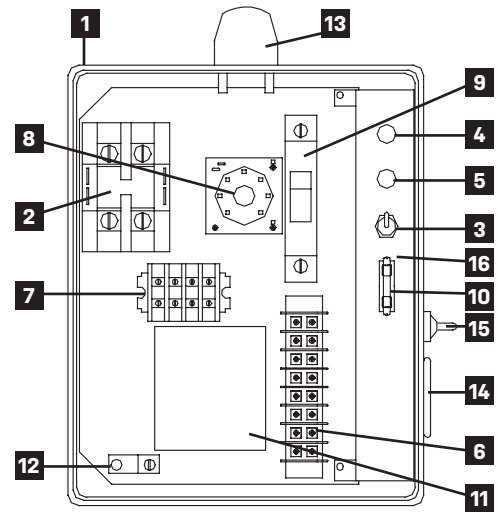

Model Shown TD1W914X

## STANDARD ALARM PACKAGE

- 13. Red Alarm Beacon** provides 360° visual check of alarm condition.
- 14. Alarm Horn** provides audio warning of alarm condition (83 to 85 decibel rating).
- 15. Exterior Alarm Test/Normal/Silence Switch** allows horn and light to be tested and horn to be silenced in an alarm condition. Alarm automatically resets once alarm condition is cleared.
- 16. Horn Silence Relay** (mounted under bracket).

**NOTE:** other options available.



## FEATURES

- Entire control system (panel and switches) is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes two 20' float switches
- Available with EZconnex® float system
- Complete with step-by-step installation instructions
- Five-year limited warranty

## OPTIONAL FEATURE

- 34" (86.36cm) Panel Mounting Post** (Factory Installed). Includes Duplex Installation Kit (Enclosure upsized to 10" x 8" x 6" (25.4 x 20.32 x 15.24 cm). Max. Enclosure size 14" x 12" x 6" (35.56 x 30.48 x 15.24 cm)



**SJE RHOMBUS**

PO Box 1708, Detroit Lakes, MN 56502  
1-888-DIAL-SJE • 1-218-847-1317  
1-218-847-4617 Fax

email: [customer.service@sjeinc.com](mailto:customer.service@sjeinc.com)

[www.sjehombus.com](http://www.sjehombus.com) B.61

**SEE REVERSE SIDE FOR ORDERING INFORMATION.  
SEE PRICE BOOK FOR LIST PRICE.**

<b>TD</b>		<b>W</b>			<b>4</b>		
-----------	--	----------	--	--	----------	--	--

## MODEL TD

### ALARM PACKAGE

- 0 = select option (If you select "0", you must select option 1F)
- 1 = alarm package (includes test/normal/silence switch, red beacon, horn)

### ENCLOSURE RATING

- W = Weatherproof, NEMA 4X (engineered thermoplastic)

### STARTING DEVICE

- 1 = magnetic motor contactor 120/208/240V
- 9 = magnetic motor contactor 120V only

### PUMP FULL LOAD AMPS

- 0 = 0-7 FLA
- 1 = 7-15 FLA
- 2 = 15-20 FLA

### PUMP DISCONNECTS

- 4 = circuit breaker

### FLOAT SWITCH APPLICATION

- H = Pump down (select 17 or 21 option)
- E = EZconnex® float switch system (select 33, 35 or 36 option, float options not applicable)
- X = no floats

## OPTIONS *Listed below*

- | CODE                         | DESCRIPTION   |
|------------------------------|---|
| <input type="checkbox"/> 1F  | Door mounted alarm indicator with horn and test/normal/silence switch<br><i>(must select "0" as an alarm package)</i> |
| <input type="checkbox"/> 4B  | Red redundant off indicator and alarm<br><i>(must select option "4D" if floats included)</i>                          |
| <input type="checkbox"/> 4D  | Redundant off float   |
| <input type="checkbox"/> 4E  | Redundant off float, alarm activation<br><i>(20' SJE PumpMaster® SPDT)</i>  |
| <input type="checkbox"/> 6A  | Auxiliary alarm contact, form A   |
| <input type="checkbox"/> 8A  | Elapsed time meter  |
| <input type="checkbox"/> 8C  | Event (cycle) counter   |
| <input type="checkbox"/> 10E | Lockable latch  |
| <input type="checkbox"/> 10K | Anti-condensation heater  |
| <input type="checkbox"/> 10P | Panel Mounting Post (Factory Installed. Includes Duplex Install. Kit)(Encl. upsized to 10x8x6.Max 14x12x6)            |
| <input type="checkbox"/> 16A | 10' cord in lieu of 20' <i>(per float)</i>  |
| <input type="checkbox"/> 16B | 15' cord in lieu of 20' <i>(per float)</i>  |
| <input type="checkbox"/> 16C | 30' cord in lieu of 20' <i>(per float)</i>  |
| <input type="checkbox"/> 16D | 40' cord in lieu of 20' <i>(per float)</i>  |
| <input type="checkbox"/> 17E | Sensor Float® Mini (redundant off, high level alarm)<br>▲ <i>(per float)</i>  |
| <input type="checkbox"/> 18A | Timer override float<br><i>(20' SJE PumpMaster®)</i> ●  |
| <input type="checkbox"/> 19X | Door mounted pump run indicator   |
| <input type="checkbox"/> 21E | SJE PumpMaster® (redundant off, high level alarm)<br>● <i>(per float)</i>   |

- | CODE                         | DESCRIPTION  |
|------------------------------|--|
| <input type="checkbox"/> 33U | EZconnex® 3-Port, 50', w/10' floats (3) / pipe clamp *               |
| <input type="checkbox"/> 35U | EZconnex® 4-Port, 50', w/10' floats (4) / pipe clamp *               |
| <input type="checkbox"/> 36E | EZconnex® 3-Port, 50', w/10' floats (2) / pipe clamp, sealing plug * |

● Mechanically-activated ▲ Mercury-activated

\* EZconnex® mechanically-activated, wide angle float switches with quick release connections