

# VARIOSPEED® 3R Control Panel

**Variable Frequency Drive controller in a NEMA 3R enclosure.**

The VARIOspeed® 3R control panel is designed to control a three phase pump in constant pressure control applications including booster pump, deep well submersible pump, and irrigation pump applications.

As flow and head conditions change in the pumping system, the VFD is able to automatically control the pump speed and maintain a constant discharge pressure. The desired set pressure is entered on the display inside the panel. The pressure transducer measures the pump discharge pressure. Not for use with sewage pumps.

## VARIOSPEED® 3R PANEL COMPONENTS

1. **Enclosure** measures 18 x 16 x 10 inches (45.72 x 40.64 x 25.40 cm) fiberglass NEMA 3R for outdoor or indoor use with removable mounting feet & locking latch. **Note:** Voltage and amp range selected may change component layout in enclosure.
2. **Vents** for VFD cooling.
3. **Fan and Thermostat** for 7.5 HP and larger HP models.
4. **Raised Terminals** for easy field connections.
5. **Circuit Breaker Disconnect**
6. **Variable Frequency Drive**
7. **Fan Control Circuit Breaker** (240V models only)
8. **Control Transformer** (480V models only - not shown)

## DISPLAY FEATURES



9. **4 Line / 20 character display**
10. **Rotary/Push button for menu navigation and editing**
11. **Left Arrow button**
12. **ESC button**
13. **Run indicator LED**
14. **Fault indicator LED**
15. **Off/Auto selector switch**

## FEATURES


- Run Dry protection (pipe burst or low pressure protection)
- High Pressure protection
- System Fault Log
- Entire control system (panel and sensor) is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Standard package includes a 0-200 PSI pressure transducer
- Five-year limited warranty
- One-year limited warranty on pressure transducer



### Pressure Booster Pump Application

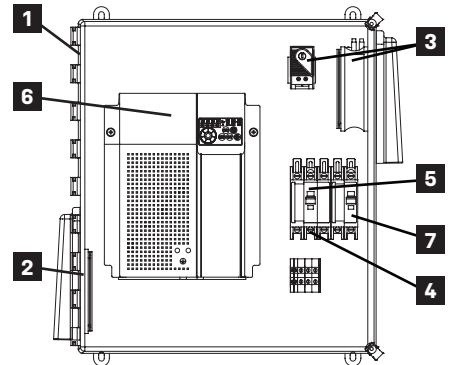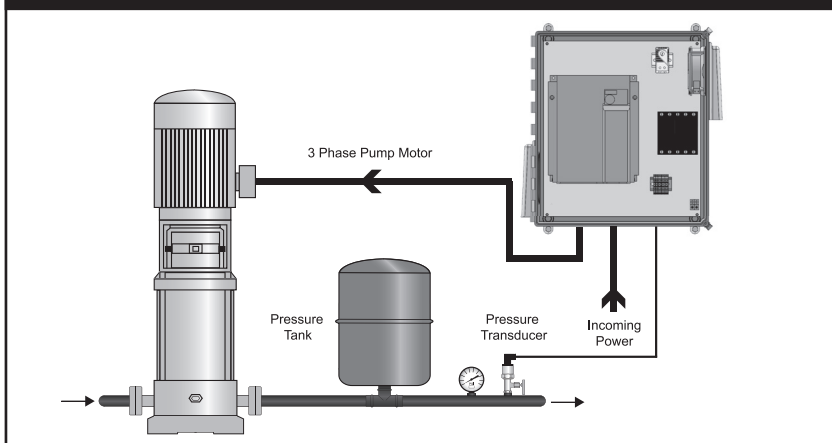

VARIOspeed® 3R (240V model)

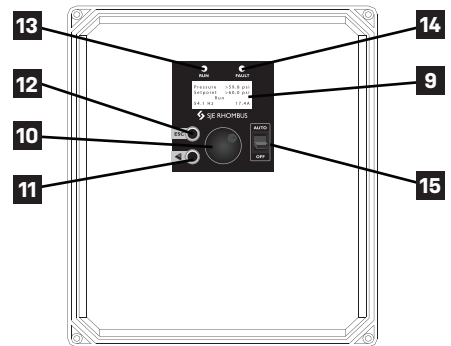

VARIOspeed® 3R door & display (mounted internally)

## SPECIFICATIONS

**POWER:** Available HP range  
(208V-240V) 1.5HP - 20HP  
(480V) 7.5HP - 20HP

**CONTROL:**  
PID control  
Adjustable electronic overload  
Auto Start on pressure drop (adjustable)  
Auto Stop on low Hz (No-Flow - sleep mode)

**PRESSURE TRANSDUCER:** 0-200 PSI  
(included) 1/4" NPT Male, NEMA 4X rated  
with 20 ft cable

**ENVIRONMENTAL:**  
Operating temperature: 14°F to 104°F  
(-10°C to 40°C)  
Storage temperature: -4°F to 131°F  
(-20°C to 55°C)  
Altitude: Maximum of 3280 ft (1000m)  
above sea level



**SJE RHOMBUS**

PO Box 1708, Detroit Lakes, MN 56502  
1-888-DIAL-SJE • 1-218-847-1317  
1-218-847-4617 Fax

email: customer.service@sjeinc.com

[www.sjerrhombus.com](http://www.sjerrhombus.com)

C.3

SEE REVERSE SIDE FOR ORDERING INFORMATION.

# VARIOSPEED® 3R Control Panel

Variable Frequency Drive controller in a NEMA 3R enclosure.

PART NUMBER	DESCRIPTION	MODEL	OUTPUT AMP	HP	INPUT PHASE	OUTPUT PHASE	LIST PRICE	SHIP WEIGHT
1030983	VARIOSpeed® 3R, 240V	VS21-7.0-N3R	7.0	1.5	1	3	\$1,916.00	31 lbs.
1030984	VARIOSpeed® 3R, 240V	VS21-10.0-N3R	10.0	3	1	3	\$2,023.00	32 lbs.
1039107	VARIOSpeed® 3R, 240V	VS23-16.5-N3R	16.5	5	3	3	\$2,282.00	31 lbs.
1030985	VARIOSpeed® 3R, 240V	VS23-31.8-N3R	31.8	7.5-10	3	3	\$3,273.00	35 lbs.
1039108	VARIOSpeed® 3R, 240V	VS23-45.0-N3R	45.0	15	3	3	\$4,086.00	42 lbs.
1039109	VARIOSpeed® 3R, 240V	VS23-58.0-N3R	58.0	20	3	3	\$4,487.00	42 lbs.
1039110	VARIOSpeed® 3R, 480V	VS43-16.0-N3R	16.0	7.5-10	3	3	\$3,712.00	47 lbs.
1039111	VARIOSpeed® 3R, 480V	VS43-29.5-N3R	29.5	15-20	3	3	\$4,468.00	47 lbs.

**NOTE:** HP rating is based on standard NEMA B 4-pole motor (used for indication only, use nameplate FLA for sizing). The output voltage of the VFD cannot exceed the incoming voltage. Example: 208V in, 208V out (max).

## SELECTING THE CORRECT VFD

1. Determine the voltage available on site.
2. Select a pump with the same voltage (motor must be 3 phase).
3. Check pump motor nameplate Full Load Amps (FLA) for proper VFD sizing.
4. Select a VFD with an output amp rating higher than motor FLA.
5. Use motor Service Factor Amps (SFA) for submersible well pump applications for VFD sizing.

## PHASE CONVERSION\*

It is possible to supply single phase 240V input power to VS23 models. The VFD output amp must be derated by 50%. Example: The VS23-45.0-N3R will be derated to 22.5A output (max).

\*Use three-phase input power if available. VS23 VFD's are not UL listed with single-phase supply. Always use a 3 phase motor.

## MAXIMUM MOTOR CABLE LENGTHS

For 208V-240V pumps: 400 ft. For cable lengths greater than 400 ft., use a load reactor. Do not exceed 800 ft.  
For 480V pumps: 50 ft. For cable lengths greater than 50 ft., use a load reactor. Do not exceed 300 ft.



**SJE RHOMBUS**

[www.sjrhombus.com](http://www.sjrhombus.com)  
[customer.service@sjeinc.com](mailto:customer.service@sjeinc.com)

**Call or fax your order!**

**1-888-DIAL-SJE (1-888-342-5753) • Fax 218-847-4617**